


INFRARED

Model PIRTB PointWatch Termination Box



- Use for stand-alone PointWatch
- Required for remote separation from U9500H transmitter
- Use with PIRECL Eclipse or PIR9400 when remote calibration initiation is required
- Magnetic reed switch calibration and LED gives calibration feedback
- Tall cover boxes with window enable one person, non-intrusive calibration
- Short cover boxes without window require two people to accomplish non-intrusive calibration

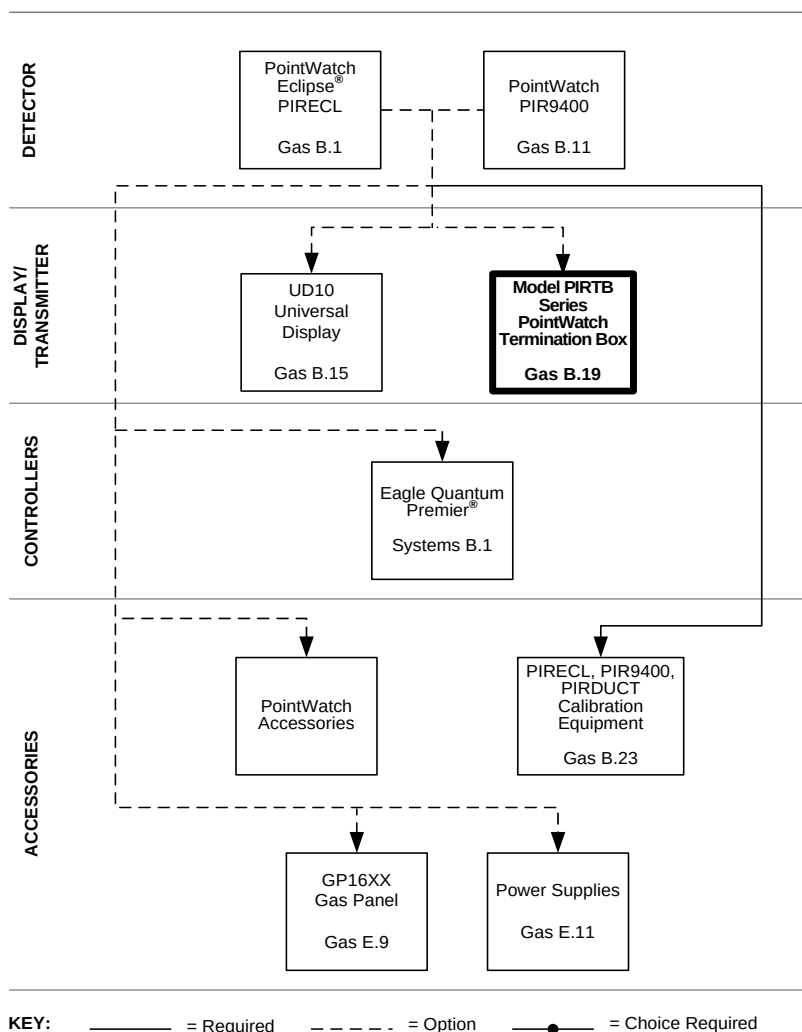

PIRTB Junction Box Model Matrix (for use with PIRECL and PIR9400)

MODEL	DESCRIPTION								
PIRTB	PointWatch Termination Box								
	<table> <tr> <th>TYPE</th><th>MATERIAL</th></tr> <tr> <td>A</td><td>Aluminum</td></tr> <tr> <td>S</td><td>Stainless Steel</td></tr> </table>	TYPE	MATERIAL	A	Aluminum	S	Stainless Steel		
TYPE	MATERIAL								
A	Aluminum								
S	Stainless Steel								
	<table> <tr> <th>TYPE</th><th># OF OPEN PORTS</th></tr> <tr> <td>2</td><td>2 Port</td></tr> <tr> <td>5</td><td>5 Port</td></tr> </table>	TYPE	# OF OPEN PORTS	2	2 Port	5	5 Port		
TYPE	# OF OPEN PORTS								
2	2 Port								
5	5 Port								
	<table> <tr> <th>TYPE</th><th>THREAD TYPE</th></tr> <tr> <td>L</td><td></td></tr> <tr> <td>N</td><td>3/4" NPT</td></tr> <tr> <td>M</td><td>Metric M20/M25</td></tr> </table>	TYPE	THREAD TYPE	L		N	3/4" NPT	M	Metric M20/M25
TYPE	THREAD TYPE								
L									
N	3/4" NPT								
M	Metric M20/M25								
	<table> <tr> <th>TYPE</th><th>APPROVALS</th></tr> <tr> <td>B</td><td></td></tr> <tr> <td>R</td><td>VNIIFTRI (Russia)</td></tr> <tr> <td>W</td><td>FM/CSA/ATEX/IECEX</td></tr> </table>	TYPE	APPROVALS	B		R	VNIIFTRI (Russia)	W	FM/CSA/ATEX/IECEX
TYPE	APPROVALS								
B									
R	VNIIFTRI (Russia)								
W	FM/CSA/ATEX/IECEX								
	<table> <tr> <th>TYPE</th><th>COVER TYPE</th></tr> <tr> <td>1</td><td>Short without window</td></tr> <tr> <td>3</td><td>Tall with window</td></tr> </table>	TYPE	COVER TYPE	1	Short without window	3	Tall with window		
TYPE	COVER TYPE								
1	Short without window								
3	Tall with window								
	<table> <tr> <th>TYPE</th><th>CABLE ENTRIES</th></tr> <tr> <td>I</td><td></td></tr> <tr> <td>L</td><td>Ports 2 and 4 open</td></tr> <tr> <td>V</td><td>Ports 2 thru 6 open</td></tr> </table>	TYPE	CABLE ENTRIES	I		L	Ports 2 and 4 open	V	Ports 2 thru 6 open
TYPE	CABLE ENTRIES								
I									
L	Ports 2 and 4 open								
V	Ports 2 thru 6 open								

Model PIRTB PointWatch Termination Boxes - short cover

Model	Part Number	Material	Threads	FM/CSA/ ATEX/ IECEX	VNIIFTRI	Ports
PIRTBA2NW1L	006414-001	AL	3/4 NPT	X		2
PIRTBA2MW1L	006414-002	AL	M20/25	X		2
PIRTBS2NW1L	006414-007	SS	3/4 NPT	X		2
PIRTBA2NW1I	006414-009	AL	3/4 NPT	X		2
PIRTBA5NW1V	006414-016	AL	3/4 NPT	X		5
PIRTBS5NW1V	006414-017	SS	3/4 NPT	X		5
PIRTBA5LW1V	006414-018	AL	M25	X		5
PIRTBS5LW1V	006414-019	SS	M25	X		5
PIRTBA2MR1L	006414-902	AL	M20/25		X	2
Ship Weight: Aluminum = 2 lb (0.95 kg) Stainless Steel = 9 lb (4.1 kg)						

Model PIRTB PointWatch Termination Boxes - tall cover

Model	Part Number	Material	Threads	FM/CSA/ ATEX/ IECEX	INMETRO	VNIIFTRI	Ports
PIRTBA2NW3L	006414-003	AL	3/4 NPT	X			2
PIRTBA2MW3L	006414-004	AL	M20/25	X			2
PIRTBS2NW3L	006414-014	SS	3/4 NPT	X			2
PIRTBA2NB3L	006414-015	AL	3/4 NPT		X		2
PIRTBA5NW3V	006414-020	AL	3/4 NPT	X			5
PIRTBS5NW3V	006414-021	SS	3/4 NPT	X			5
PIRTBA5LW3V	006414-022	AL	M25	X			5
PIRTBS5LW3V	006414-023	SS	M25	X			5
PIRTBA2MR3L	006414-904	AL	M20/25			X	2
Ship Weight: Aluminum = 2.2 lb (1kg) Stainless Steel = 9.5 lb (4.3 kg)							

Stop Plugs and Reducers

Part Number	Description	Ship Weight
101197-001*	Stop Plug, 3/4" NPT, AL	<1 lb (<0.45 kg)
101197-004*	Stop Plug, 3/4" NPT, SS	<1 lb (<0.45 kg)
101197-005	Stop Plug, M25, AL, IP66	<1 lb (<0.45 kg)
101197-003	Stop Plug, M25, SS, IP66	<1 lb (<0.45 kg)
010816-001*	Stop Plug, 20 Pack, 3/4"NPT, AL	1 lb (0.45 kg)
010817-001*	Stop Plug, 20 Pack, 3/4"NPT, SS	2 lb (0.9 kg)
010818-001	Stop Plug, 20 Pack, M25, AL,IP66	1.5 lb (0.7 kg)
010819-001	Stop Plug, 20 Pack, M25, SS,IP66	3.25 lb (1.5 kg)
102804-001	Reducer, M25 to M20, AL	<1 lb (<0.45 kg)
102804-003	Reducer, M25 to M20, SS	<1 lb (<0.45 kg)

*NEMA/TYPE 4 and IP66 rating requires addition of Teflon tape.